GROUND WATER SURVEY CONSULTANCY **GEOLOGISTS, GEOPHYSICISTS & TUBEWELL ENGINEERS**

GEO-PHYSICAL WELL ELECTOLOGGING REPORT

Ref No:-A- 1633

Date:- 13-09-2023

NAME OF SITE

Gram Panchayat- Sikrodi

BLOCK-Salarpur

DISTT-Badaun

NAME OF AGENCY

M/s PNC-SPML-JV Badaun



Maple and in GROUND WATER SURVEY CONSULTANCY Electric Well Logging, Geophysical Resistivity Survey, Ground Water Investigations. 112 A-Shree Nagar Colony, Firozabad Road, Agra- 282006 (M): 9412260823, 9794625420, 9761163000, Email: gwsc agra@yahoo.com

1.3. 34

. Ground Watel

ISO ; 9001 : 2015

Sonsultancy

REPORT ON GEOPHYSICAL WELL LOGGING AT

GRAM PANCHAYAT- SIKRODI, BLOCK- SALARPUR, DISTT.- BADAUN UNDER JAL JIVAN MISSION

Introduction :

A Deep bore hole was drilled 130 mtrs. depth. and Logged depth 130 mtrs. at above site. Was drilled by M/S PNC-SPML-JV, Badaun.

On the request of M/S PNC-SPML-JV, Badaun. a Geophysical well Logging is conduct at above bore hole using IGIS Well Logger on 13.Sep.2023.

Logging Para meters - Self potential, short normal (N-16), Long Normal (N-64), Lateral. Details of major aquifer formations explored from logging of bore hole combined with the study of Strata Chart prepared from drill cuttings are given in the following table:-

S.No.	Depth range(m)	Thickness(m)	Lithology	Expected Water Quality
1.	0 - 5	5	Surface soil	- Mater Quanty
2.	5 - 10	5	Dry sand	
3.	10 - 21	11	Clay kankar	
4. ·	21 - 28	7	Medium sand	Medium
5.	28 - 32	4	Clay kankar	
6.	32 - 38	6	Fine to Medium sand	Medium
7.	38 - 41	3	Clay kankar	
8.	41 - 71*	30	Medium sand & kankar	Medium
9	71 - 80	9	Clay kankar	
10.	80 - 83*	3	Fine to Medium sand	Medium
11.	83 - 87	4	Clay kankar	
12.	87 - 92*	5	Medium sand	Medium
13.	92 - 108	. 16	Clay kankar	
14.	108 - 113*	5	Medium sand	Medium
15.	113 - 126	13	Clay kankar	
16.	126 - 130	4	Medium sand	Medium



Conclusions and Recommendations :-

11 ,


19

- 1. The Lithology broadly tallies with that of drill cutting strata chart.
- 2. The zones marked with asterisk (*) appear to be aquifer zones for possible development of tubewell.
- 3. The Quality of water is expected Medium.
- 4. It is recommended to have a chemical and bacteriological analysis of the water sample before using it for human consumption or for any other use.
- All projections and recommendations are subject to the inherent limitations of the technique employed and there could be variations as the underground conditions are not always amenable to physical interpretations.

Geophysicist

Ground Water Survey Consultancy

C Sugar

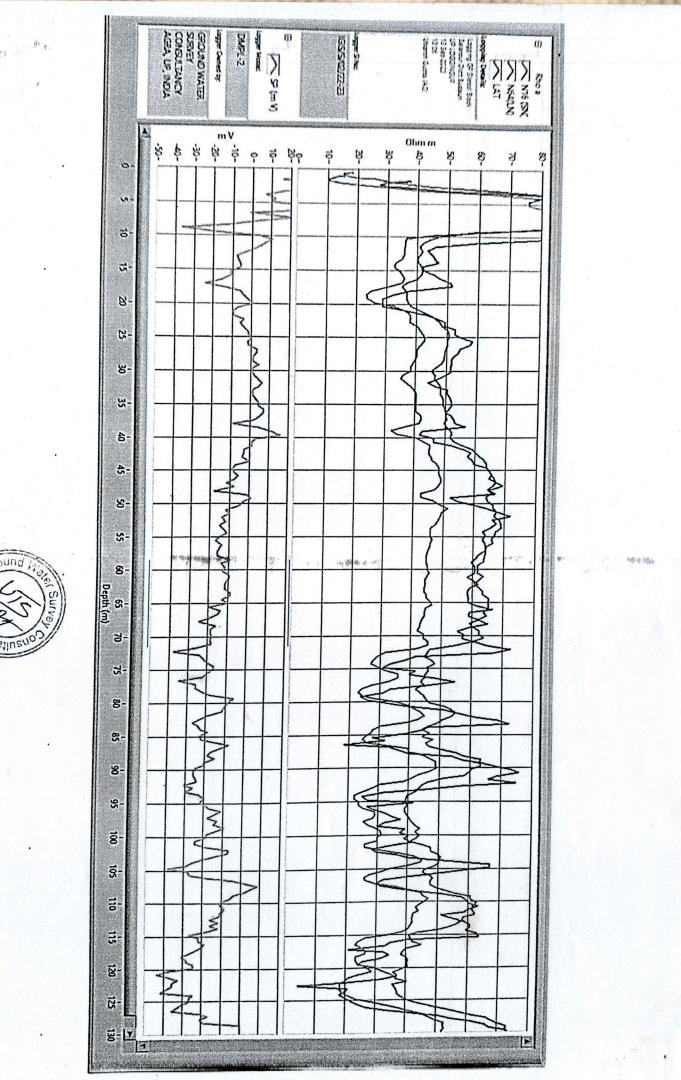

Ground In × Agra Sueinsuo

.

()