

GROUND WATER SURVEY CONSULTANCY
GEOLOGISTS, GEOPHYSICISTS & TUBEWELL ENGINEERS

GEO-PHYSICAL WELL
ELECTROLOGGING REPORT

Ref No:-B-2034

Date:- 13-10-2023

NAME OF SITE

GRAM PANCHAYAT- Sirsaul

BLOCK- Dahagawan

DISTT- Badaun

NAME OF AGENCY

M/s PNC-SPML-JV
Badaun



GROUND WATER SURVEY CONSULTANCY

Electric Well Logging, Geophysical Resistivity Survey, Ground Water Investigations.

112 A-Shree Nagar Colony, Firozabad Road, Agra- 282006

(M) : 9412260823, 9794625420, 9761163000, Email : gwsc_agra@yahoo.com

ISO ; 9001 : 2015

Ground Water Survey Consultancy

Aggra

REPORT ON GEOPHYSICAL WELL LOGGING AT

GRAM PANCHAYAT- SIRSAUL, BLOCK- DAHAGAWAN, DISTT- BADAUN UNDER JAL JIVAN MISSION

Introduction :

A Deep bore hole was drilled 140 mtrs. depth. and Logged depth 140 mtrs. at above site. Was drilled by M/S PNC-SPML-JV, Badaun.

On the request of M/S PNC-SPML-JV, Badaun. a Geophysical well Logging is conduct at above bore hole using IGIS Well Logger on 13.Oct.2023.

Logging Para meters - Self potential, short normal (N-16), Long Normal (N-64), Lateral. Details of major aquifer formations explored from logging of bore hole combined with the study of Strata Chart prepared from drill cuttings are given in the following table:-

S.No.	Depth range(m)	Thickness(m)	Lithology	Expected Water Quality
1.	0 - 5	5	Surface soil	
2.	5 - 15	10	Fine sand	
3.	15 - 20	5	Clay kankar	
4.	20 - 27	7	Fine to Medium sand	Medium
5.	27 - 31	4	Clay kankar	
6.	31 - 34	3	Fine to Medium sand	Medium
7.	34 - 45	11	Clay kankar	
8.	45 - 55*	10	Medium sand	Medium
9.	55 - 62	7	Clay kankar	
10.	62 - 70*	8	Medium sand	Medium
11.	70 - 75	5	Clay kankar	
12.	75 - 86*	11	Medium sand	Medium
13.	86 - 95	9	Clay kankar	
14.	95 - 100*	5	Fine to Medium sand	Medium
15.	100 - 104	4	Clay kankar	
16.	104 - 116*	12	Fine to Medium sand	Medium
17.	116 - 140	24	Clay kankar	

Conclusions and Recommendations :-

1. The Lithology broadly tallies with that of drill cutting strata chart.
2. The zones marked with asterisk (*) appear to be aquifer zones for possible development of tubewell.
3. The Quality of water is expected Medium.
4. It is recommended to have a chemical and bacteriological analysis of the water sample before using it for human consumption or for any other use.
5. All projections and recommendations are subject to the inherent limitations of the technique employed and there could be variations as the underground conditions are not always amenable to physical interpretations.

Geophysicist




Ground Water Survey Consultancy

Rho s
 NI6 (M)
 NI6(LM)
 LAT
 Logging Details:
 Logfile: G:\13731\13731_000001
 Station: DSWN11036N036W
 Date: 13 Oct 2013
 Time: 21:35
 Datafile: gwr2a_013731

Logger Site:
 (GIS/S/04/21-32)

Logger Model:
 SP (m V)
 DMPL-2

Logger Owned by:
 GROUND WATER
 SURVEY
 CONSULTANCY
 - AGRA INDIA

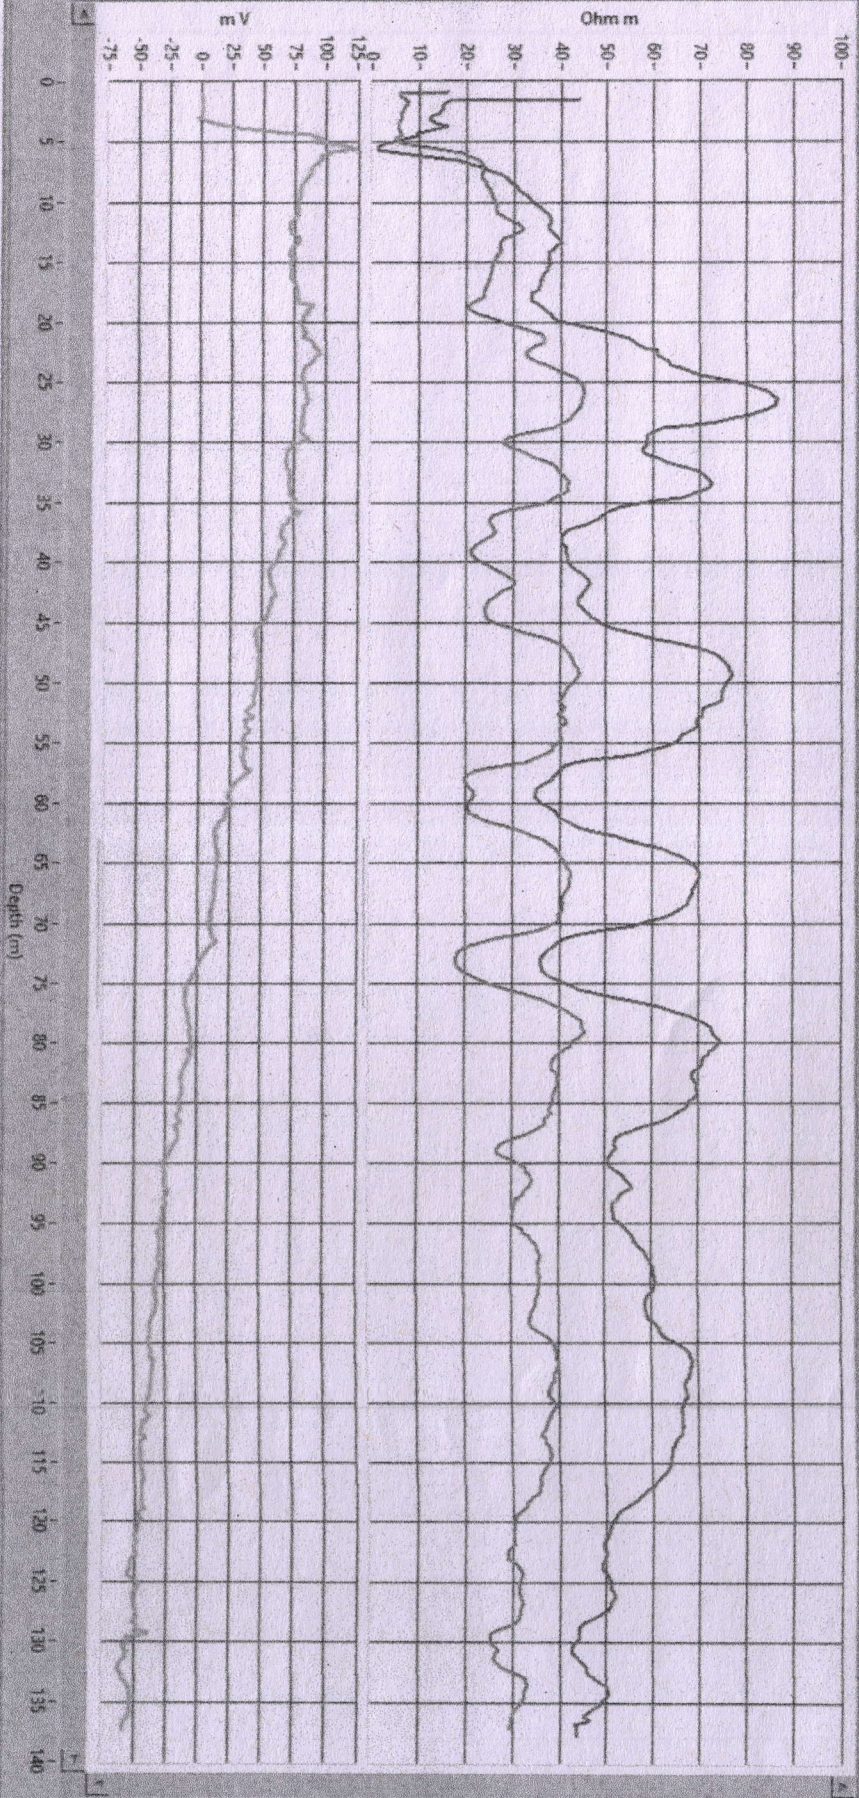

2