

ELECTRIC LOGGING REPORT

BORE SITE --- DUTT NAGAR
BLOCK -- PILANA
DISTRICT -- BAGHAPAT
LOGGING DATE – 12.01.2021

NAME OF AGENCY

L.C. INFRA PROJECT PVT LTD
AHMADABAD

M/S MAHALUXMI TUBE WELL

ELECTRIC LOGGING REPORT

8800225625
8901332878

ML Gupta, M.Sc. (Geophysics)
(Ex-Dy Director, HSMITC)

Email aquasolutions06@gmail.com
Date 12.01.21

Bore site DUTT NAGAR
Borehole drilling depth-----160m
Bore logged depth -----160m
Electric logger used -----Continuous recording - IGIS make
Parameters recorded -----S.P.
Short normal 16''
Long Normal 64'
Logging date ----- 12-01-2021


Aquifer zones deciphered (below 30m)

| :SN | ZONES(m) | TYPE | Formation | Quality |
|-----|----------|-------|-------------|---------|
| 1 | 34-59 | Clean | Medium sand | fresh |
| 2 | 61-73 | Clean | Medium sand | Fresh |
| 3 | 103-123 | Clean | Medium sand | Fresh |
| 4 | 141-149 | Clean | Medium sand | Fresh |
| 5 | 154-160 | Clean | Medium sand | Fresh |

Depths not included above indicate clay formations

Water quality is likely to be fresh at site.

ASSEMBLY

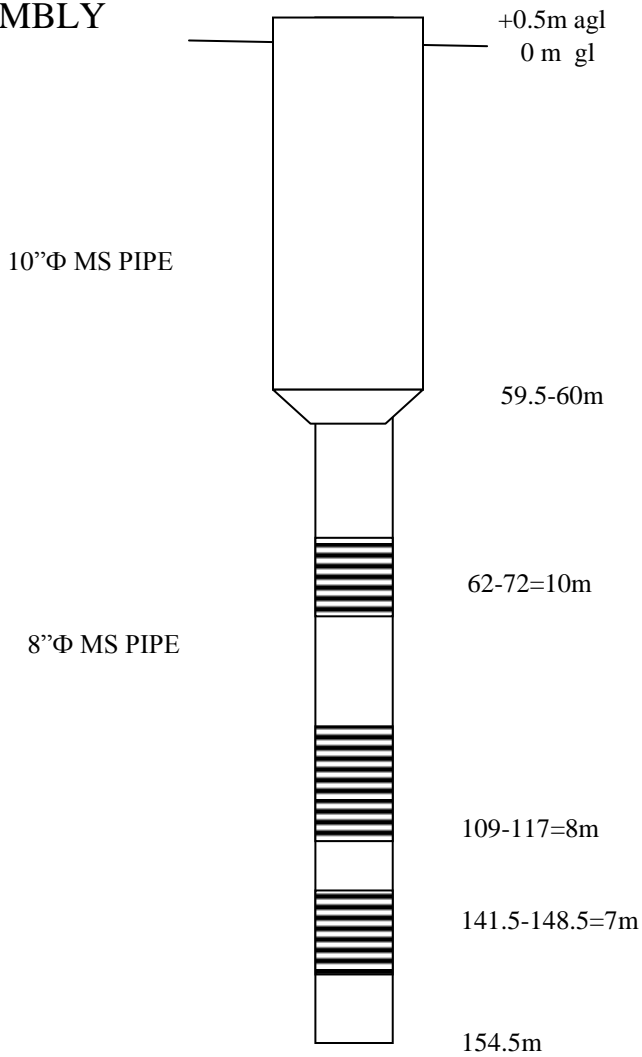

ML Gupta
(ML Gupta)