

ELECTRIC LOGGING REPORT

BORE SITE --- SARBARHPUR TURHERI
BLOCK -- JANSATH
DISTRICT -- MUZAFFAR NAGAR
LOGGING DATE – 6.10.22

NAME OF AGENCY
N K G INFRASTRUCTURE LTD
DELHI

PARAMJIT MACHINE TOOLS INDUSTRIES
KAITHAL ROAD ,PEHOWA,KURUKSHETRA,HARYANA PIN -136128
94160021005;9416021005;989658805
Specialists in manufacturing of Reverse rotary,Percussion rigs;
heavy duty Direct rotary rig &Deep tube well boring

ELECTRIC LOGGING REPORT

8800225625

8901332878

ML Gupta, M.Sc. (Geophysics)
(Ex-Dy Director, HSMITC)

Date 6.10.22

Bore site SARBARHPUR TURHERI
Borehole drilling depth-----150M
Bore logged depth -----146.5M
Electric logger used -----Continuous recording - IGIS make
Parameters recorded -----S.P.
Short normal 16''
Long Normal 64'
Logging date ----- 6.10.22

LITHOLOGICAL UNITS AT SITE

Depth(m)	Formation	Quality
0-2	Top soil	
2-8	Coarse sand	
8-44	Clay	
44-53	Medium/coarse sand	Fresh
53-56	Clay	
56-93	Medium sand+kankar	Fresh
93-98	Clay	
98-112	Medium/coarse sand	Fresh
112-115	Clayey sand	
115-126	Medium/coarse sand	Fresh
126-136	Clayey sand	
136-146.5	Medium/coarse sand	Fresh



Water quality is likely to be fresh at site.

ZONES RECOMMENDED (Strainer positions)

From	To	Thickness (m)
56	- 68	12
83	- 89	6
98	104	6
116	122	6
	Total	30



(ML Gupta)

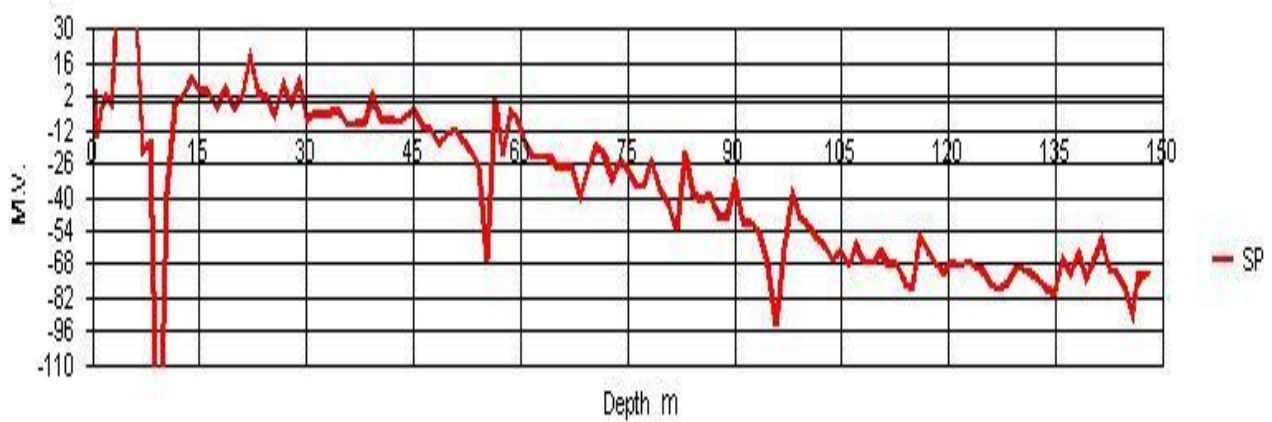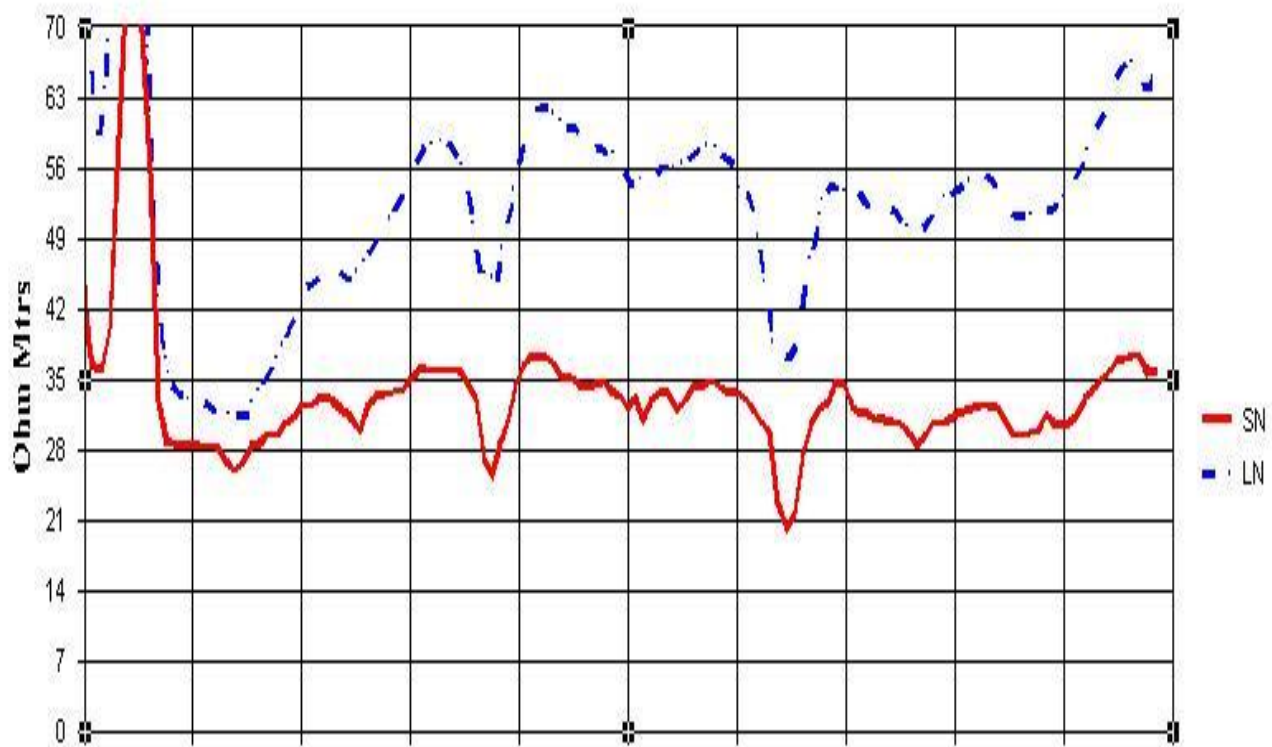

WellID TULHERI22D11

Date 10/6/2022 1:57:30 PM