

ELECTRIC LOGGING REPORT

BORE SITE --- HASIMPUR
BLOCK -- JANSATH
DISTRICT -- MUZAFFAR NAGAR
LOGGING DATE – 7.5.23

NAME OF AGENCY
N K G INFRASTRUCTURE LTD
DELHI

PARAMJIT MACHINE TOOLS INDUSTRIES
KAITHAL ROAD ,PEHOWA,KURUKSHETRA,HARYANA PIN -136128
94160021005;9416038105;9896588005
Specialists in manufacturing of Reverse rotary,Percussion rigs;
heavy duty Direct rotary rig &Deep tube well boring

ELECTRIC LOGGING REPORT

8800225625

8901332878

ML Gupta, M.Sc. (Geophysics)
(Ex-Dy Director, HSMITC)

Date 7.5.23

Bore site HASIMPUR

Borehole drilling depth-----150M

Bore logged depth -----150M

Electric logger used -----Continuous recording - IGIS make

Parameters recorded -----S.P.

Short normal 16''

Long Normal 64'

Logging date ----- 7.5.23

LITHOLOGICAL UNITS AT SITE

Depth(m)	Formation	Quality
0-3	Top soil	
3-11	Fine/medium sand	
11-54	Medium sand	Fresh
54-58	Clay	
58-101	Medium/coarse sand	Fresh
101-104	Clay	
104-139	Medium/coarse sand	Fresh
139-150	Coarse sand	Fresh

Water quality is likely to be fresh at site.



ZONES RECOMMENDED (Strainer positions)

From		To	Thickness (m)
84	-	96	12
108	-	114	6
126	-	132	6



(ML Gupta)

Encl:E LOG

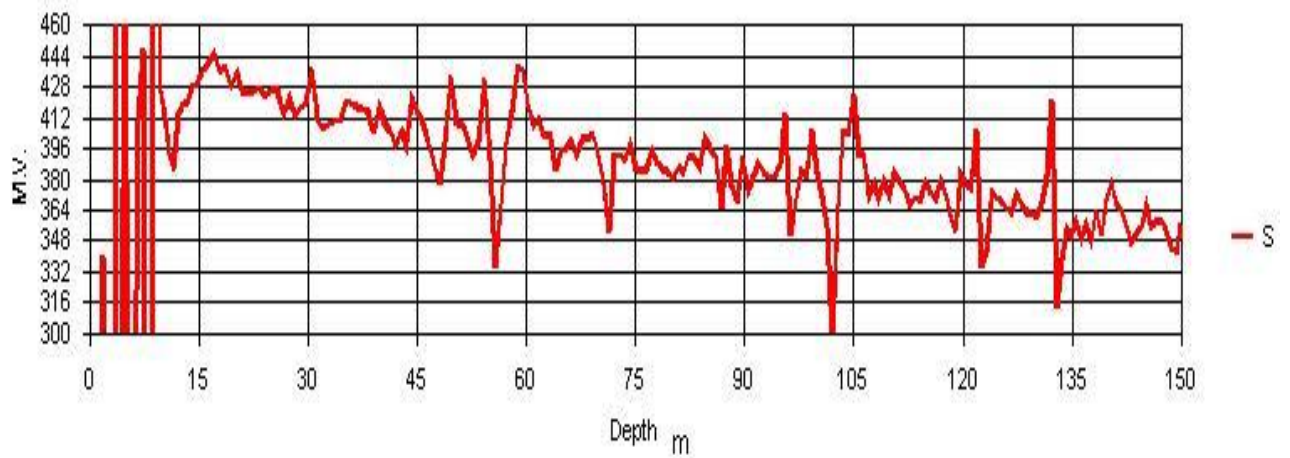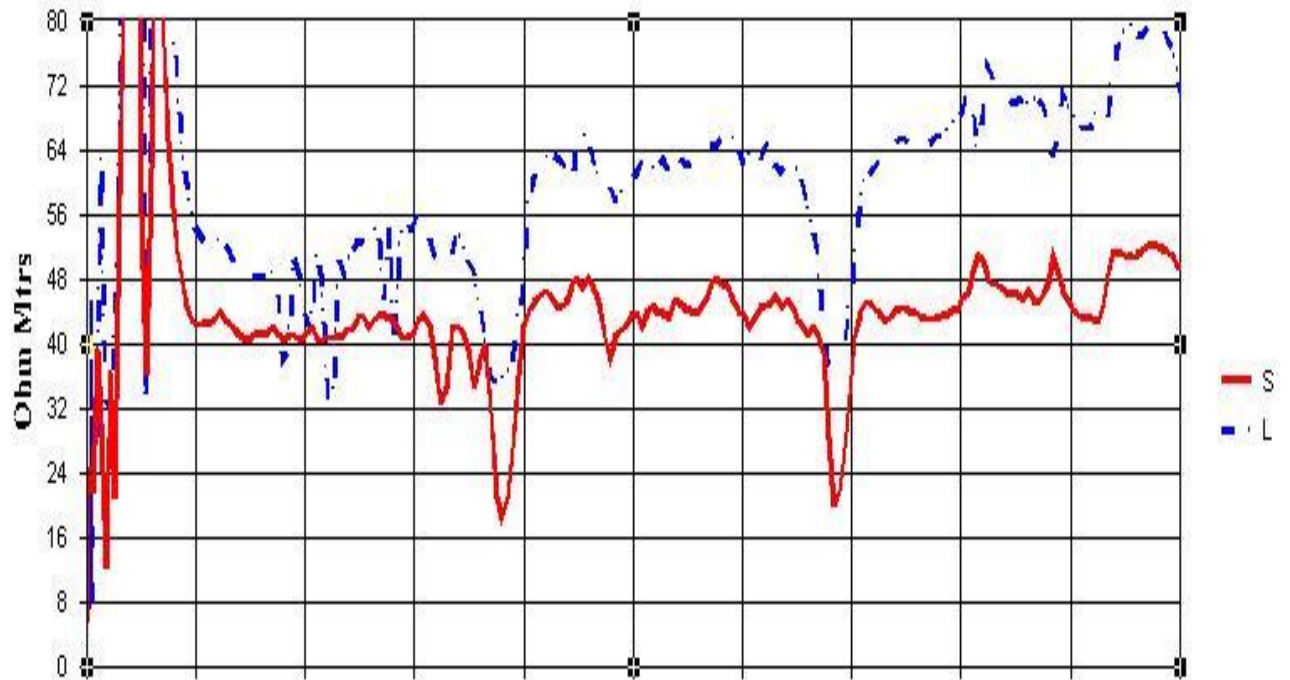

WellID HASIM23D1

Date 5/7/2023 12:22:56 PM