GROUND WATER SURVEY CONSULTANCY

GEOLOGISTS, GEOPHYSICISTS & TUBEWELL ENGINEERS

GEO-PHYSICAL WELL ELECTOLOGGING REPORT

Ref No:-B- 233

Date: - 25-04-2023

NAME OF SITE

GRAM PANCHAYAT- Kanakpur

BLOCK-Bilaspur

DISTT- Rampur

NAME OF AGENCY

M/s PNC-SPML-JV Moradabad 22, CAMAC STREAT, BLOCK-A, 3rd FLOOR, KOLKATA-700016



GROUND WATER SURVEY CONSULTANCY

Electric Well Logging, Geophysical Resistivity Survey, Ground Water Investigations. 112 A-Shree Nagar Colony, Firozabad Road, Agra- 282006 (M): 9412260823, 9794625420, 9761163000, Email: gwsc_agra@yahoo.com

ISO: 9001: 2015
Ground Water Survey Consultancy

* Agra *

REPORT ON GEOPHYSICAL WELL LOGGING AT

GRAM PANCHAYAT- KANAKPUR, BLOCK- BILASPUR, DISTT- RAMPUR UNDER JAL JIVAN MISSION

Introduction:

A Deep bore hole was drilled 140 mtrs. depth. and Logged depth 140 mtrs. at above site. Was drilled by M/S PNC-SPML-JV, Moradabad.

On the request of M/S PNC-SPML-JV, Moradabad. a Geophysical well Logging in the above bore hole using IGIS Well Logger on 25.April.2023.

Logging Para meters - Self potential, short normal (N-16), Long Normal (N-64), Lateral. Details of major aquifer formations explored from logging of bore hole combined with the study of Strata Chart prepared from drill cuttings are given in the following table:-

S.No.	Depth range(m)	Thickness(m)	Lithology	Expected Water Quality
1.	0 - 5	5	Surface soil	
2.	5 - 20	15	Fine to Medium sand	Good
3.	20 - 25	5	Clay kankar	
4.	25 - 28	3	Fine sand	Good
5.	28 - 35	7	Clay kankar	
6.	35 - 45	10	Medium sand	Good
7.	45 - 50	5	Clay kankar	
8.	50 - 58*	8	Medium sand	Good
9.	58 - 65	7	Clay kankar	
10.	65 - 71*	6	Fine to Medium sand	Good
11.	71 - 85	14	Clay kankar	
12.	85 - 115*	30	Medium sand & kankar	Good
13.	115 - 122	7	Clay kankar	
14.	122 - 132*	10	Medium sand	Good
15.	132 - 138	6	Clay kankar	
16.	138 - 140	2	Fine sand	Good


Ground Water Survey Consultancy

Conclusions and Recommendations :-

- The Lithology broadly tallies with that of drill cutting strata chart.
- The zones marked with asterisk (*) appear to be aquifer zones for possible development of tubewell.
- 3. The Quality of water is expected Good.
- It is recommended to have a chemical and bacteriological analysis of the water sample before using it for human consumption or for any other use.
- All projections and recommendations are subject to the inherent limitations of the technique employed and there could be variations as the underground conditions are not always amenable to physical interpretations.

Geophysicist

Ground Water Survey Consultancy

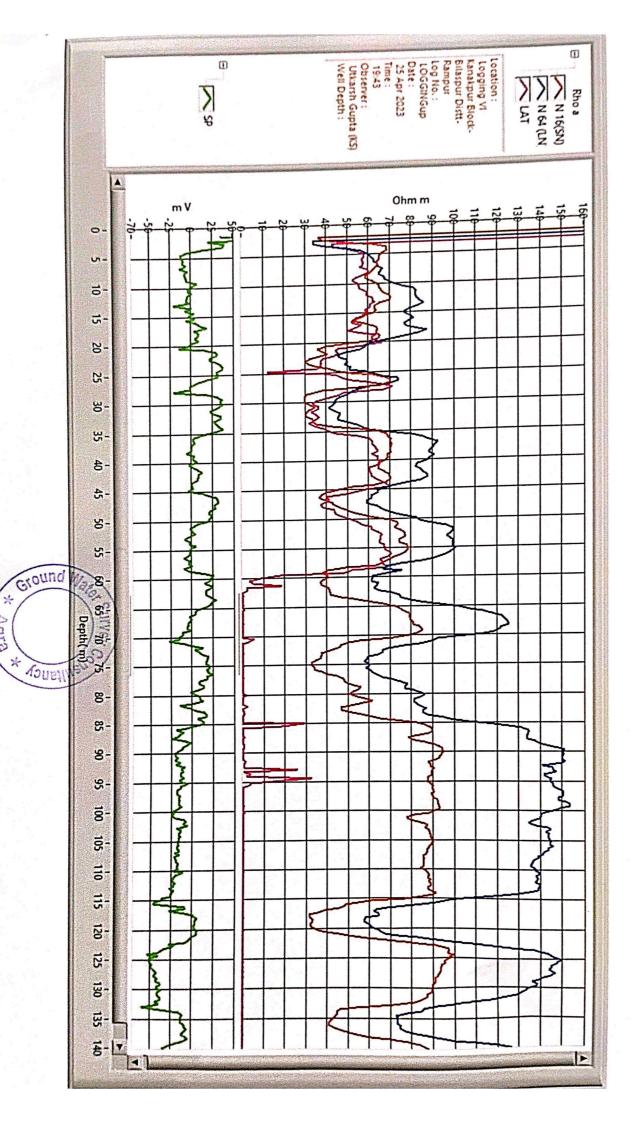

Agra