m/s. Wood Hill

GLOBAL GROUND WATER CONSULTANTS

84-III Floor, Humayunpur, Safdarjung Enclave, New Delhi - 110 029
Mobile : 9818 888 824, 9818 007 038
E-mail : srikanthchukka.c23@gamil.com, ravikanth44@yahoo.com

Tokry

GEOPHYSICAL ELECTRICAL LOGGING REPORT AT

Tubewell No. : .....

Date : 30.3.2023

Village : LAKHNAUR

Block : BALIA KHERI

District : SAHARANPUR, U.P

Depth in Metres	Expected Litholog	Expected Water Quality
0 - 3m	Surface Soil	
3 - 12	medium sand	
12 - 27 ⊛	Fine to medium sand	Good
27 - 32	Sandy clay	
32 - 41 ⊛	medium sand	Good
41 - 47	Sandy clay	
47 - 70 ⊛	Coarse Sand	Good
70 - 88 ⊛	Fine sand	Good
88 - 106 ⊛	medium sand	Good
106 - 110	clay	
110 - 132 ⊛	medium to fine sand	Good
132 - 136	Sandy clay	
136 - 145 ⊛	medium sand	Good
145 - 165	clay kankar	

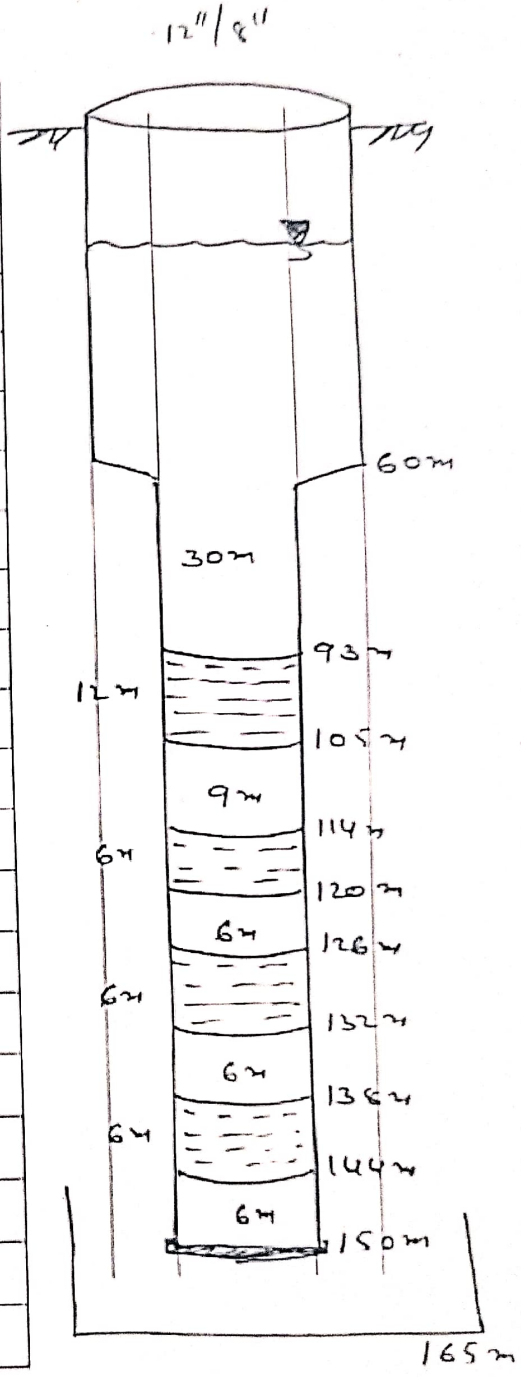

For Global Groundwater Consultants

M. RAVI KANTH
30/3/2023

⊛ EXPECTED WATER ZONE

▽ WATER LEVEL : ....12..... METRES