GROUND WATER SURVEY CONSULTANCY

GEOLOGISTS, GEOPHYSICISTS & TUBEWELL ENGINEERS

GEO-PHYSICAL WELL **ELECTOLOGGING REPORT**

Ref No:-B-2962

Date: - 23-01-2024

NAME OF SITE'1111

Gram Panchayat- Dharera

BLOCK-Bisauli

DISTT-Badaun

NAME OF AGENCY

M/s PNC-SPML-JV Badaun



GROUND WATER SURVEY CONSULTANCY

Electric Well Logging, Geophysical Resistivity Survey, Ground Water Investigations. 112 A-Shree Nagar Colony, Firozabad Road, Agra- 282006 (M): 9412260823, 9794625420, 9761163000, Email: gwsc agra@yahoo.com

ISO; 9001: 2015

Ground Water Survey Consultancy



REPORT ON GEOPHYSICAL WELL LOGGING AT

GRAM PANCHAYAT- DHARERA, BLOCK- BISAULI, DISTT- BADAUN UNDER JAL JIVAN MISSION

Introduction:

A Deep bore hole was drilled 110 mtrs. depth. and Logged depth 110 mtrs. at above site. Was drilled by M/S PNC-SPML-JV, Badaun.

On the request of M/S PNC-SPML-JV, Badaun. a Geophysical well Logging in the above bore hole using IGIS Well Logger on 23.Jan.2024.

Logging Para meters - Self potential, short normal (N-16), Long Normal (N-64), Lateral. Details of major aquifer formations explored from logging of bore hole combined with the study of Strata Chart prepared from drill cuttings are given in the following table:-

S.No.	Depth	Thickness(m)	Lithology	Expected
5.140.	range(m)	1 mekness(m)	Zimoregy	Water Quality
1.	0 - 5	5	Surface soil	
2.	5 - 18	13	Dry sand	
3.	18 - 25	7	Clay kankar	
4.	25 - 28	3	Fine sand	
5.	28 - 35	7	Clay kankar	
6.	35 - 45	10	Medium sand	Medium
7.	45 - 67	22	Clay kankar	
8.	67 - 75*	8	Medium sand	Medium
9.	75 - 78	3	Clay kankar	
10.	78 - 83*	5	Fine to Medium sand	Medium
11.	83 - 87	4	Clay kankar	
12.	87 - 95*	8	Medium sand	Medium
13.	95 - 102	7	Clay kankar	
14.	102 - 106*	4	Fine to Medium sand	Medium
15.	106 - 110	4	Clay kankar	

Ground Water Survey Consultancy


Conclusions and Recommendations :-

- The Lithology broadly tallies with that of drill cutting strata chart.
- 2. The zones marked with asterisk (*) appear to be aquifer zones for possible development of tubewell.
- The Quality of water is expected Medium.

0

- 4. It is recommended to have a chemical and bacteriological analysis of the water sample before using it for human consumption or for any other use.
- 5. All projections and recommendations are subject to the inherent limitations of the technique employed and there could be variations as the underground conditions are not always amenable to physical interpretations.

Geologist

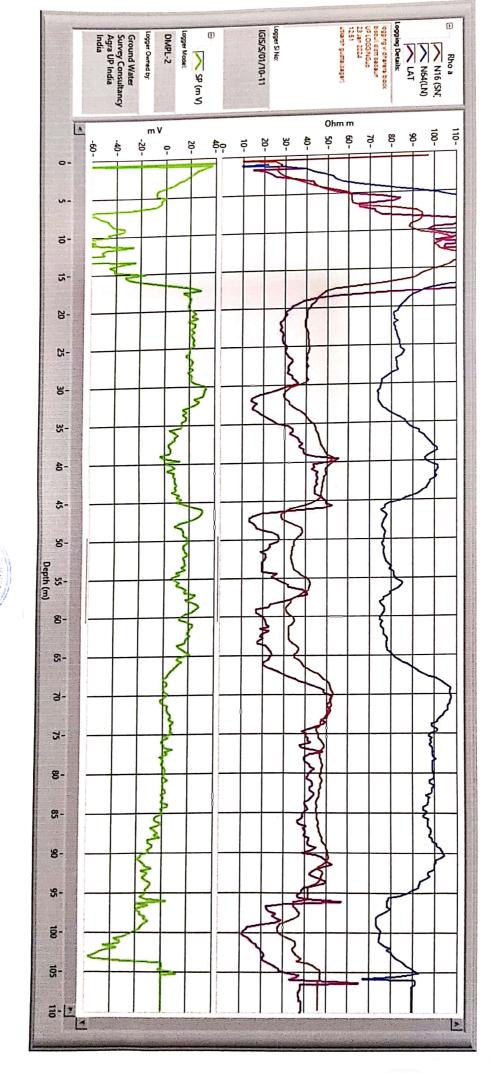

C