

BORE WELL DEVELOPMENT CHART (B.M)

SWSM/DWSM

NCC LTD. - GORAKHPUR (UP)

NAME OF THE DISTRICT:

Gorakhpur

NAME OF THE BLOCK:

Chargaram

NAME OF THE GRAM PANCHAYAT:

Neharpur

NAME OF THE VILLAGE:

Exchange - 4/10/01

TYPE OF RIG M/C: RC/DC
 SIZE OF BORE: 550x500
 STATIC WATER LEVEL: A. Nehara
 J.B Incharge: A. Nehara
 A.B Incharge: Babbar Yadav


DEPTH B.G.L. IN METER

DN

ASSEMBLY DETAILS

200	mm Dia Housing Pipe A.C.L. = .50
202	mm Dia Housing Pipe 0 m to 35.60
202	mm Dia Reducer 35.60 m to 35.80
150	mm Dia Blind pipe 35.80 m to 37.50
150	mm Dia Blind pipe 37.50 m to 39.30
150	mm Dia Blind pipe 39.30 m to 40.50
150	mm Dia Blind pipe 40.50 m to 46.50
150	mm Dia Blind pipe 46.50 m to 55.80
150	mm Dia Blind pipe 55.80 m to 117.55

EXECUTED ASSEMBLY

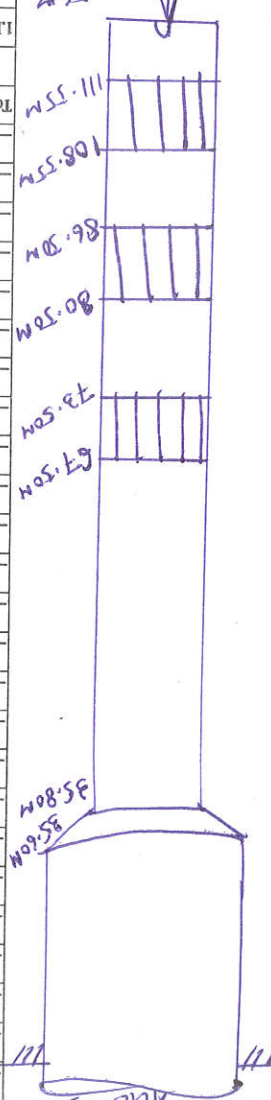

ABSTRACT

1	Drilling Started - 15/6/23
2	Drilling Completed/Lowering - 16/6/23
3	Drilling Depth (m) - 118.06
4	Assembly Lowered (m) - 118.06
5	Housing Pipe (m) - 36.10
6	Plain Pipe (m) - 66.76
7	Slotted Pipe (m) - 15
8	Reducer (m) - 20

1	24-28 = 4m
2	46-54 = 8m
3	56-63 = 7m
4	67-74 = 7m
5	80-87 = 7m
6	102-112 = 10m
7	134-144 = 10m

LOGGING REPORT

VERTICALITY TEST: *100%*

SOUND TEST:

STRATA

BORING CHART

clay

Medium sand

Sandy clay

Medium sand

soft clay

Medium sand with kanker

hard clay

Medium sand

Sandy clay

coarse sand

clay with kanker

Medium sand

Sandy clay with kanker

Medium sand

clay

clay

clay

150m

144.84

134.34

127.54

102.24

87.84

80.34

74.54

67.24

63.64

58.34

47.54

46.44

28.54

24.34

DN